SS-U571

SERVICE MANUAL

E Model

SPECIFICATIONS

Speaker system	3-way speaker system
Speaker units	Woofer: 25 cm (10 inches), cone type Mid-range: 10 cm (4 inches), cone type Tweeter: 8 cm (3.5 inches), cone type
Enclosure type	Bass reflex
Nominal impedance	8 ohms
Power handling capacity	Nominal: 80 watts Maximum: 160 watts
Sensitivity	91 dB (1 watt, 1 m)
Frequency range	50 Hz–20,000 Hz
Dimensions	Approx. 320×675×260 mm (w/h/d) (12⅝×26⅝×10¼ inches) including front grill (per speaker)
Weight	Approx. 9.5 kg (21 lb 11 oz)

1. WIRING DIAGRAM

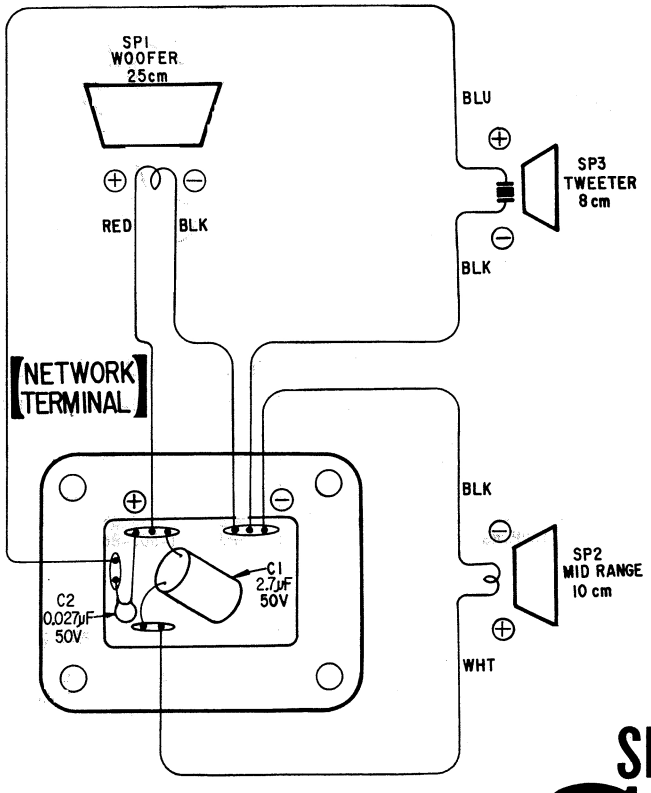

SPEAKER SYSTEM

SONY®

AUD

2. EXPLODED VIEW AND PARTS LIST

NOTE:

The mechanical parts with no reference number in the exploded views are not supplied.

· Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

· The construction parts of an assembled part are indicated with a collation number in the remark column.

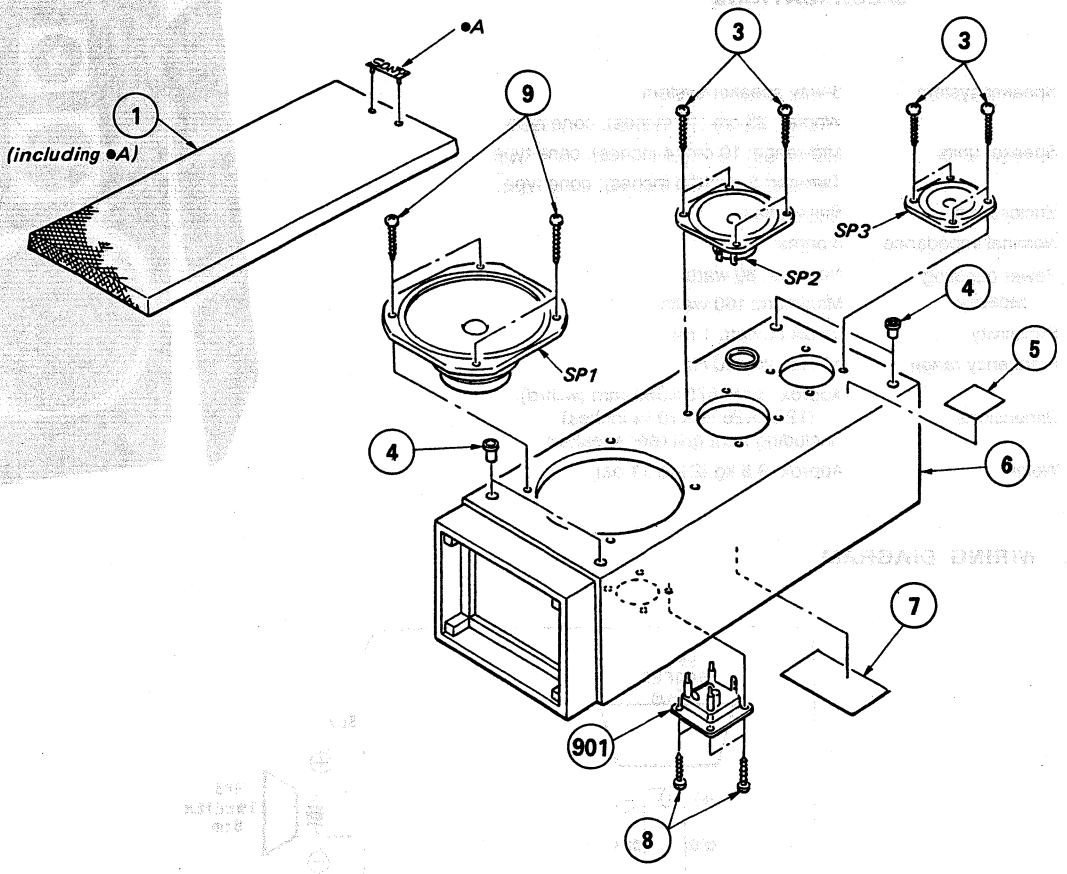

GENERAL SECTION

No.	Part No.	Description	Remarks
1	X-4905-145-1	PANEL ASSY, FRONT	
3	7-621-846-40	SCREW +P 4X16 TYPE4	
4	4-905-155-01	CATCHER	
5	*4-920-072-01	EMBLEM, BAFFLE BOARD	
6	*4-920-073-01	CABINET, SPEAKER	
7	4-875-621-00	LABEL, CAUTION	
8	7-621-849-10	SCREW +P 3X14 TYPE4	
9	4-905-172-01	SCREW (5X25), TAPPING	

ELECTRICAL PARTS

Ref.No.	Part No.	Description	Remarks
901	1-536-810-31	TERMINAL BOARD (SPEAKER)	
C1	1-123-213-21	CAP, ELECT 2.7MF 10% 50V	
C2	1-130-488-11	CAP, ELECT 0.027MF 5% 50V	
SP1	1-503-537-11	SPEAKER, CONE (25CM) WOOFER	
SP2	1-503-863-11	SPEAKER, CONE (10CM) MIDRANGE	
SP3	1-503-862-11	SPEAKER, CONE (8CM) TWEETERE	

ACCESSORY & PACKING MATERIAL

	1-556-650-00	CORD, SPEAKER CONNECTION
	3-769-324-42	MANUAL, INSTRUCTION

© 1987. 7.